



Cap

impact resistant, robust

Arrangement of motor

vertical – dust is kept away, durable

Speed regulation

adaptation of speed (EBS 125.4 RO)

Dust guard

foldable front edge to get to the edge of the working area

Brush rim

protection against dust emission

Vibration damping

splitting between motor and handle (patented) – efficient vibration absorption, protects the wrists of the user, better grinding performance

Vacuum cleaner connection

für dust extraction



FEATURES OF CONCRETE GRINDERS

The EIBENSTOCK concrete grinder sets the standards in terms of their handiness. The special parallel grip design provides the user with numerous benefits including even distribution of pressure on the disc, even overhead. The use of a vacuum cleaner with the dusthood ensures a clean working environment, but also prolongs the lifetime of the machine.

Concrete grinder EBS 180 H

The powerful hand-held grinder for medium sized surfaces


USE:

- Grinding and smoothing of surfaces
- Removing of screed seams, residual mud, plaster and coatings
- Preparing of surfaces, e.g. for tile renovation
- Concrete, screed, tile adhesive, natural stone, plaster, paint, coatings, carpet adhesive – with corresponding grinding wheels (accessories)

FEATURES:

- Powerful 2500 W motor
- Electronic – soft start, temperature control and over current cut-off
- Foldable front edge of dust guard – for grinding directly to the edge of the work area (no laborious reworking, saves time and costs)
- Brush rim – high suction power for dust-free working by connecting an industrial vacuum cleaner (accessory) to the 35 mm nozzle
- Locking for suction hose – avoids unintentional loosening of the hose during grinding
- Parallel handle position – ergonomic handles allow exact and balanced guiding for a better surface finish

for every surface: PCD-grinding wheel with monobloc diamonds – high removal rate and long lasting (accessory)

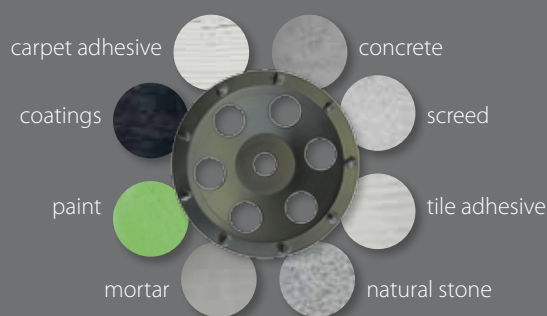

SPECIFICATIONS	EBS 180 H
Power input	2500 W
Rated voltage	230 V ~
No-load speed	8500 rpm
Disc diameter	180 mm
Spindle connection	Ø 22.2 mm
Weight	8.4 kg
Order no.	0633H000
Supplied	in a case incl. diamond-grinding wheel (concrete) and assembly tools

