



Only about 1.5 kg perceived weight

only in conjunction with EIBENSTOCK industrial vacuum cleaner DSS 25 M

Ø 225

SPECIFICATIONS	ELS 225.1
Power input	590 W
Rated voltage	230 V ~
Rated speed	1050-1600 rpm
Disc diameter	225 mm
Spindle connection	M 14 (velcro)
Weight	4.9 kg
Order no.	0620N000
Supplied	in a box incl. transport bag, extension, sanding pad starter kit (1x P80/P100/P120) and brush rim

Long reach sander ELS 225.1

The lightweight for large surface performance with patented VacuGlide-System for relaxed working

USE:


- Effort- and time-saving sanding of walls and ceilings for the dry-wall construction
- Sanding of filling compounds
- Sanding works during renovating and painting works, for example the removing of wallpaper residues
- Sanding of heat insulation panels

FEATURES:

- Electronic – soft start, electronic overload protection
- Exchangeable flexible drive shaft
- Robust joint for optimum adaptation to inclination angle
- Spring-mounted exhaust hood with sealing lip – optimal adaptation to the surface
- Efficient dust extraction through the hood and perforated sanding disc
- Sealing lip exchangeable against brush rim for other sanding operations
- Extension for high ceilings and walls (up to about 3 m)
 - no additional tools such as ladder or scaffolding, saves time in the application
- Lightweight, balanced and ergonomic design – easy to use, comfortable sanding, numerous grip positions



holding weight

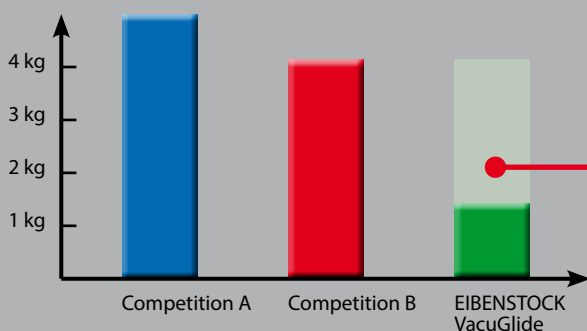

VacuGlide-System

- the long reach sander is held on the ceiling or wall due to its suction force and can be guided without problem
 - permanent, energy-sapping pressing isn't necessary
- **More than 60 % less effort in comparison to comparable sanding solutions**
- Stress-relieved sanding of ceilings and walls
- Saves the health, more economic working
- Prevention of pain in the back, neck and shoulder



strenuous was yesterday

lightweight is today



Competition

EIBENSTOCK


Adjustable suction capacity and contact pressure for better guiding of the sander on the surface, adaptation of the removal rate



Exchangeable flexible drive shaft – short design, can be changed easily, quickly and inexpensively by the user without opening the machine



Spring-mounted exhaust hood prevents grooving during preparation and compensates unevenness



Base plate achieves very smooth surfaces



Dust-proofed on/off switch and setting wheel for variable speed control – optimum adaptation of the speed to the surface




Additional handle – ergonomic handling, variably adjustable at the machine (accessory)



	PROTECTION SYSTEM	
	HEALTH	



Sanding/Milling/Smoothing ACCESSORIES

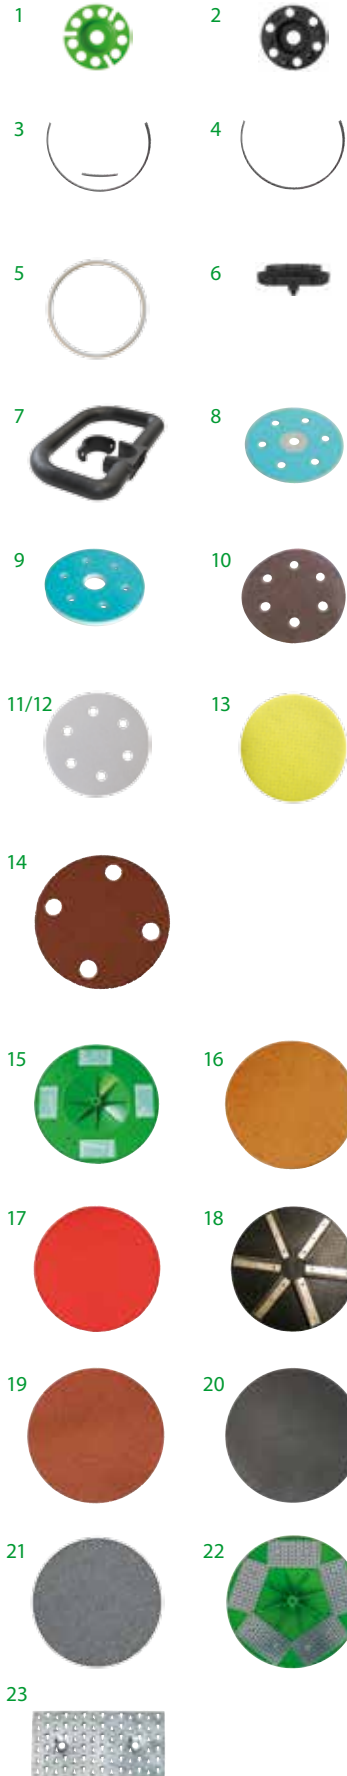

FOR SURFACE MILLING MACHINE		
1	Carbide milling disc for wood surfaces	37124000
2	PCD milling disc for mineral surfaces (round segments)	37125000
FOR LONG REACH SANDER AND DRY-WALL SANDER		
	Brush rim	
3	ETS 225, 2 parts	37624000
4	ELS 225.1	3722B000
5	Sealing lip VacuGlide ELS 225.1	3722C000
6	Segment incl. brush for dust guard ETS 225	37625000
7	Additional handle ELS 225/ELS 225.1	37659000
8	Base plate (velcro), 6 hole punch	37631000
9	Rubber foam pad (velcro), 6 hole punch	37632000
10	Sanding grid (velcro), 6 hole punch	
	P80 (10 pieces)	37610000
	P120 (10 pieces)	37611000
11	Sandpaper (velcro), 6 hole punch	
	P24 Semi-friable Corundum (10 pieces)	37608000
	P40 Normal Corundum (25 pieces)	37642000
	P60 Normal Corundum (25 pieces)	37643000
	P80 Normal Corundum (25 pieces)	37644000
	P100 Normal Corundum (25 pieces)	37645000
	P120 Normal Corundum (25 pieces)	37646000
	P150 Normal Corundum (25 pieces)	37647000
	P180 Normal Corundum (25 pieces)	37648000
	P220 Normal Corundum (25 pieces)	37649000
12	Sandpaper Assortment (velcro), 6 hole punch	37640000
	P80/100/120/150/180 Normal Corundum (je 5 pieces)	
13	Sanding pad (velcro), perforated	
	P40 (10 pieces)	37672000
	P60 (10 pieces)	37673000
	P80 (10 pieces)	37674000
	P100 (10 pieces)	37675000
	P120 (10 pieces)	37676000
	P150 (10 pieces)	37677000
	P180 (10 pieces)	37678000
	P220 (10 pieces)	37679000
FOR INSULATION BOARD SANDER		
14	Sandpaper (velcro), 4 hole punch	37671000
	P24 (3 pieces)	
FOR PLASTER SMOOTHING MACHINES		
15	Base plate Ø 370 mm	37721000
16	Sponge disc Ø 400 mm (velcro)	37722000
17	Sponge rubber disc Ø 385 mm (velcro)	37725000
18	Scraping disc Ø 380 mm (velcro)	37726000
19	Sanding disc P24, Ø 370 mm (velcro)	37727000
20	Smoothing disc Ø 380 mm	37728000
21	Felt disc Ø 395 mm	37729000
22	Scratching disc Ø 370 mm	37724000
23	Add on kit for scratching disc (set of 5 scratching metal sheets + 10 screws)	37723000