


PROFESSIONAL GERMAN SINCE 1919

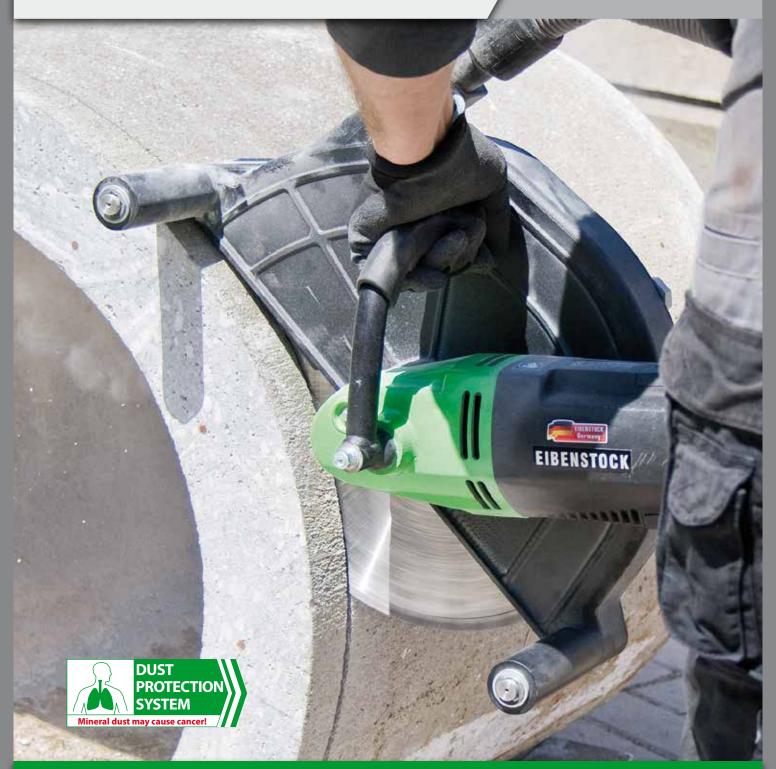

# 

ETR 350.1 P / ETR 400.1 P (nass/trocken)
Powerful with big cutting depth up to 152 mm

### The cutting systems for dust reduced cutting ETR 350.1 P / ETR 400.1 P (wet/dry)

Big cutting depth up to 152 mm (ETR 400.1 P)



Performance optimized & more powerful special motor with power electronics













SPECIFICATIONS	ETR 350.1 P	ETR 400.1 P
Power input	2700 W	2850 W
Rated voltage	230 V ~	230 V ~
Rated speed	2.200 rpm	1.950 rpm
Max. disc diameter	350 mm	400 mm
Max. cutting depth	130 mm	152 mm
Spindle connection	Ø 25.4 mm	Ø 25.4 mm
Weight	12.9 kg	13.4 kg

in a box incl. diamond cutting Supplied disc, dust guard and assembly tools



#### integrated water supply with flow regulator

easy adjustment of the watervolume





#### dry cut for renovation

where no wet cut is possible - e.g. Living room renovation

#### APPLICATION:

- Cutting of mineral materials, f. e. concrete, brick and natural stone
- Cut-outs in brickwork
- Wall cuttings for installations
- Slitting of expansion joints
- Civil engineering, drilling and sawing contractors, gardening and landscaping

## Simple, safe guidance through innovative drive concept








#### **FEATURES:**

- Special oil bath gearbox with optimal adjusted speed for fast working
- Electronic soft start, constant speed, temperature control and over current cut-off, overload indication
- Best results in system with the EE premium diamond cutting disc
- Immersion function
- Adjustable cutting depth limitation without any tools f. e. for the cutting of screed (accessory)
- Adapter and diamond cutting disc for working near to the edge (accessory)
- Exact wall cuttings by using a guide rail (accessory) easy mounting, easy feed, low vibration
- Wide supporting rolls exact guiding
- Spindle lock easy tool change
- Robust metal suction hood
- Handle and hood adjustable ergonomic handling in different working positions
- Nozzle diameter 35 mm direct connection of industrial vacuum cleaner of EIBENSTOCK DSS series
- Cut-off carbon brushes protection of the motor









the edge (accessory)










#### **FEATURES:**

- Quick mounting
- Easy transport by only person
- Robust carriage mounted on roller bearings – easy feed
- Easy modular possibility of extension for long straight cuts









Accessories	Order no.	Order no.
	ETR 350.1 P	ETR 400.1 P
Set of Guide rails 200 cm 2x Guide rail 100 cm incl. machine holder, connection and mounting Choose and order also the fastening set!	3744N000	3744N000
Guide rail 100 cm incl. connection and		
mounting	3744P000	3744P000
Choose and order also the fastening set!		
Fastening set for Guide rails  For assembly required!	35729000	35729000
Diamond cutting disc Universal	37475000	37475000
Plug (Aluminium) for dust extraction	37476000	37476000
Absolutely necessary when cutting metal		
Diamond cutting disc Premium	3744G000	3744T000
Diamond cutting disc near to the edge Premium	3744H000	3744V000
Set of Adapter for cutting near to the edge	3744K000	3744W000
Adjustment and limitation for cutting depth incl. cover plate	3744L000	3744U000

Hazardous dust (e. g. silica dust) has to be suctioned by a Dust Class M Vacuum Cleaner! For our electric power tools we are recommending to use a Vacuum Cleaner of our Eibenstock DSS range!



Elektrowerkzeuge GmbH Eibenstock Auersbergstraße 10 08309 Eibenstock, Germany

Phone: +49 (0) 3 77 52 - 50 30 Fax: +49 (0) 3 77 52 - 20 19 Internet: www.eibenstock.com E-Mail: office@eibenstock.com

Certified according to DIN EN ISO 9001:2015 Technical changes excepted! Illustrations may vary! Your dealer::