







- No mounting damage to the wall as with "conventional" drill stands, fast and without dowels
- For EIBENSTOCK diamond core drills as well as core drills of various manufacturers with max. 60 mm clamping collar
- The drill stand can be braced between the floor and ceiling using a telescopic tripod system
- Drilling in floor, wall and ceiling possible, stable, solid ceiling is required
- In the case of unstable ceilings, the USD 182 can also be mounted using dowel fastening
- Flexible, stepless adjustment of drilling height by crank feed





Specifications	USD 182
Max. drilling diameter	182 mm
Machine mounting	collar mounting Ø 60 mm
Max. telescopic length	3018 mm
Machine swivel arm	1160 mm
Weight	39.9 kg
Order no.	096U1000

USD 182 with feed lever, allen key

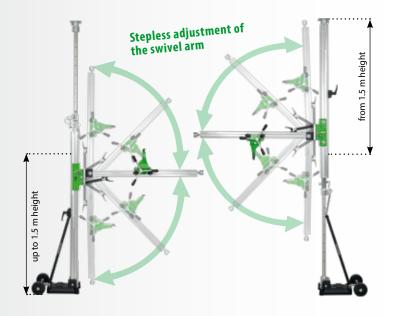

Reducing ring for mounting



Ø 60 - Ø 53 mm

Ø 60 - Ø 46 mm

Ø 60 - Ø 43 mm

If required, also order!

Elektrowerkzeuge GmbH Eibenstock Auersbergstraße 10 08309 Eibenstock, Germany

Phone: +49 37752 503-0 Web: www.eibenstock.com E-Mail: office@eibenstock.com

Certifed according to DIN EN ISO 9001:2015
Technical changes excepted! Illustrations may vary!

.. - Stand U3,