




EIBENSTOCK
Elektrowerkzeuge

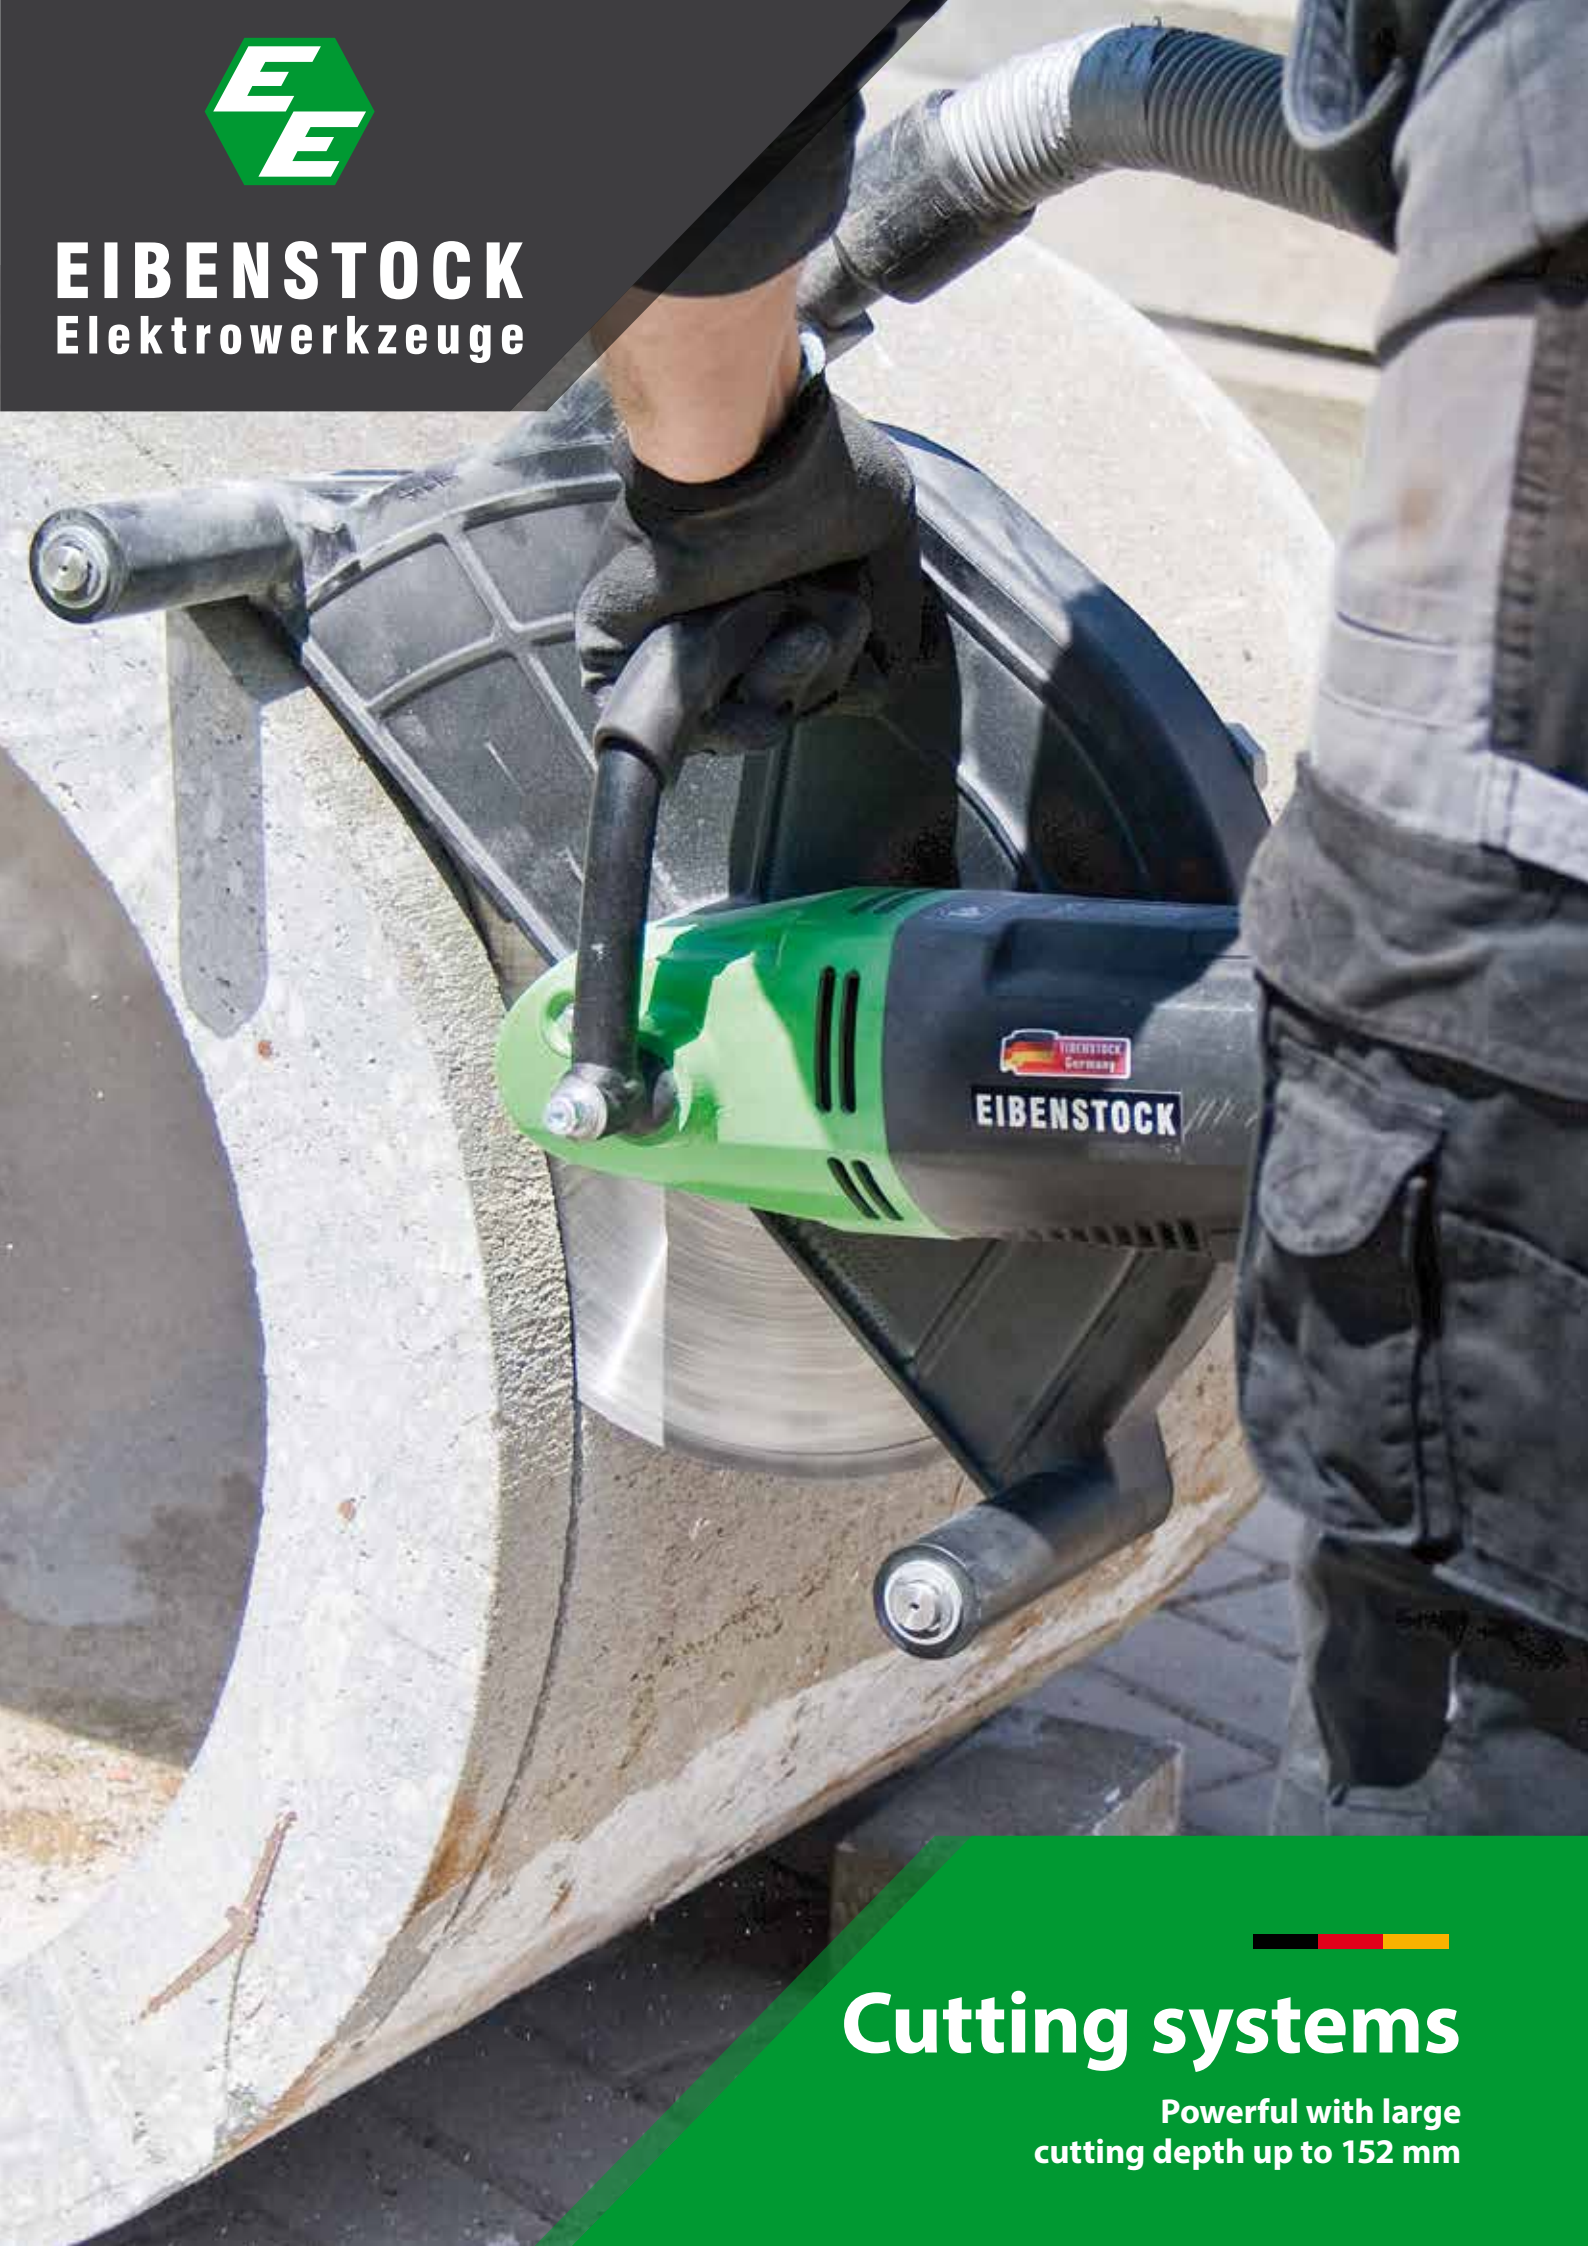

Cutting systems

Powerful with large
cutting depth up to 152 mm

The cutting systems for dust reduced cutting ETR 350.1 P / ETR 400.1 P (wet/dry)

**Big cutting depth up to 152 mm
(ETR 400.1 P)**



**Performance optimized
& more powerful
special motor with
power electronics**



SPECIFICATIONS	ETR 350.1 P	ETR 400.1 P
Power input	2700 W	2850 W
Rated voltage	230 V ~	230 V ~
Rated speed	2.200 rpm	1.950 rpm
Max. disc diameter	350 mm	400 mm
Max. cutting depth	130 mm	152 mm
Spindle connection	Ø 25.4 mm	Ø 25.4 mm
Weight	12.9 kg	13.4 kg
Order no.	0681A000	0682A000

Supplied in a box incl. diamond cutting disc, dust guard and assembly tools



**integrated
water supply with
flow regulator**

*easy adjustment of the
watervolume
- low dust working*



**dry cut for
renovation**

where no wet cut is possible - e.g. Living room renovation

APPLICATION:

- Cutting of mineral materials, f. e. concrete, brick and natural stone
- Cut-outs in brickwork
- Wall cuttings for installations
- Slitting of expansion joints
- Civil engineering, drilling and sawing contractors, gardening and landscaping

**Simple, safe guidance
through innovative drive
concept**

- ➔ **no Kick-Back**
- ➔ **pulls into the material**



FEATURES:

- Special oil bath gearbox with optimal adjusted speed for fast working
- Electronic - soft start, constant speed, temperature control and over current cut-off, overload indication
- Best results in system with the EE premium diamond cutting disc
- Immersion function
- Adjustable cutting depth limitation without any tools f. e. for the cutting of screed (accessory)
- Adapter and diamond cutting disc for working near to the edge (accessory)
- Exact wall cuttings by using a guide rail (accessory) - easy mounting, easy feed, low vibration
- Wide supporting rolls - exact guiding
- Spindle lock - easy tool change
- Robust metal suction hood
- Handle and hood adjustable - ergonomic handling in different working positions
- Nozzle diameter 35 mm - direct connection of industrial vacuum cleaner of EIBENSTOCK DSS series
- Cut-off carbon brushes - protection of the motor



precise cutting depth adjustment (accessory)



Set of Adapter for cutting near to the edge (accessory)

Accessory

System of guide rails



Safe, precise and energy-saving system of guide rails with crank feed for relaxed working

fast mounting of the machine without any tools




Accessory

System of guide rails

Safe, precise and energy-saving with crank feed for relaxed working

FEATURES:

- Quick mounting
- Easy transport by only person
- Robust carriage mounted on roller bearings – easy feed
- Easy modular possibility of extension for long straight cuts
- fast mounting of the machine without any tools

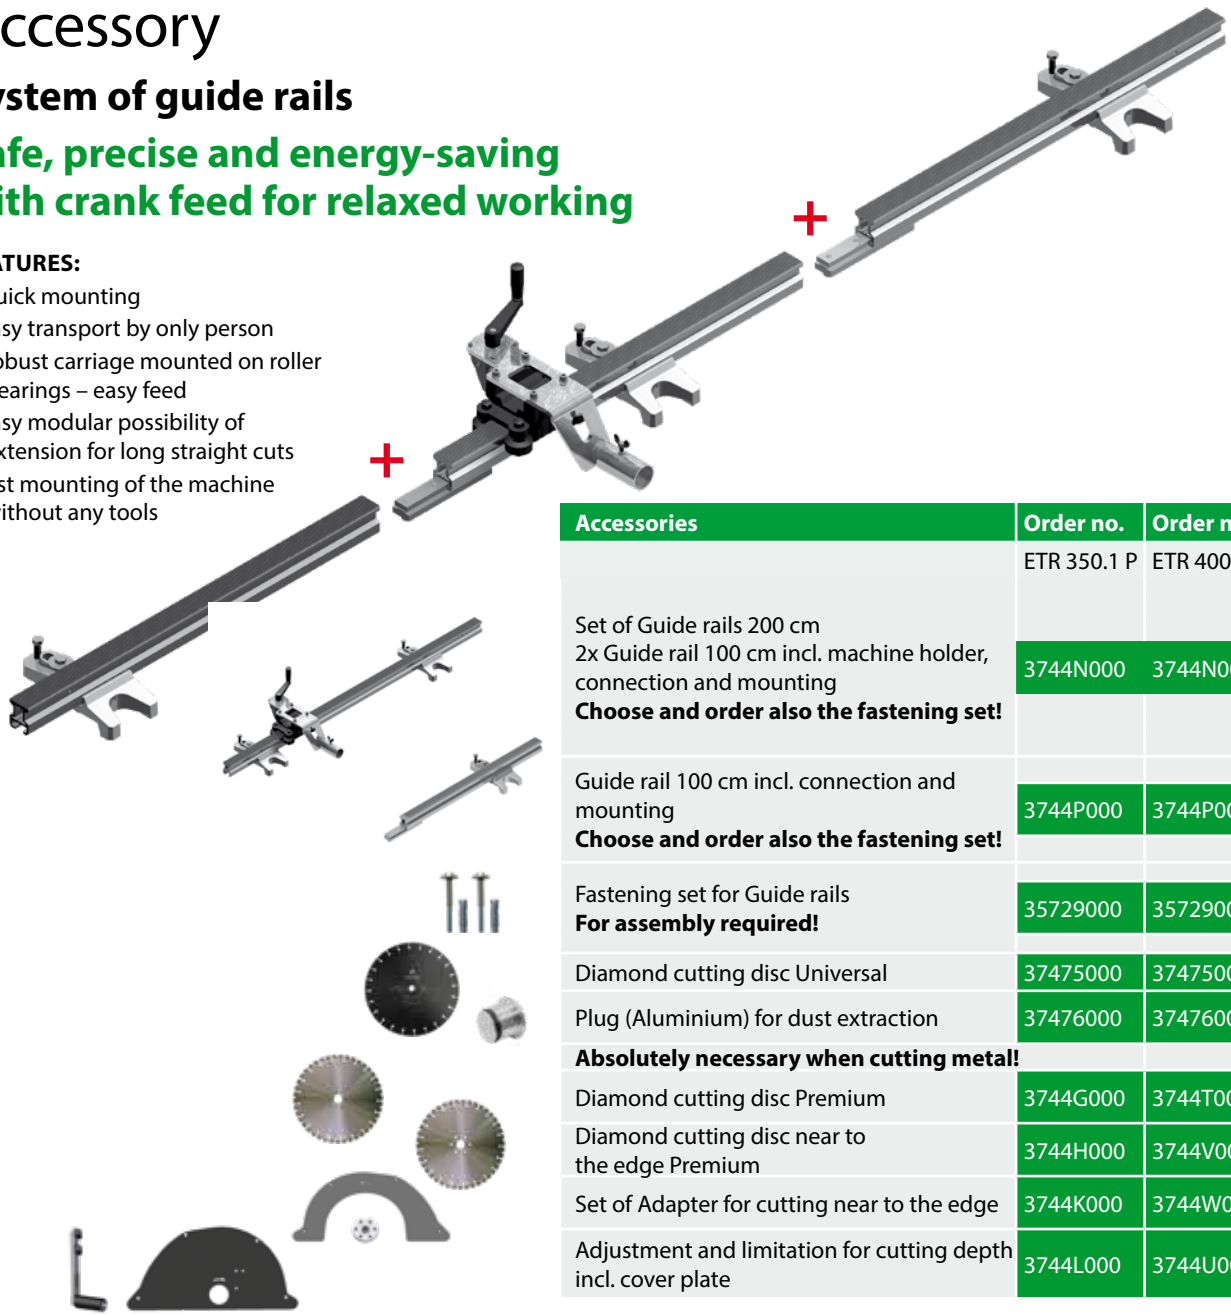

Accessories	Order no.	Order no.
	ETR 350.1 P	ETR 400.1 P
Set of Guide rails 200 cm 2x Guide rail 100 cm incl. machine holder, connection and mounting Choose and order also the fastening set!	3744N000	3744N000
Guide rail 100 cm incl. connection and mounting Choose and order also the fastening set!	3744P000	3744P000
Fastening set for Guide rails For assembly required!	35729000	35729000
Diamond cutting disc Universal	37475000	37475000
Plug (Aluminium) for dust extraction	37476000	37476000
Absolutely necessary when cutting metal!		
Diamond cutting disc Premium	3744G000	3744T000
Diamond cutting disc near to the edge Premium	3744H000	3744V000
Set of Adapter for cutting near to the edge	3744K000	3744W000
Adjustment and limitation for cutting depth incl. cover plate	3744L000	3744U000



Hazardous dust (e. g. silica dust) has to be suctioned by a Dust Class M Vacuum Cleaner! For our electric power tools we are recommending to use a Vacuum Cleaner of our Eibenstock DSS range!



Elektrowerkzeuge GmbH Eibenstock
Auersbergstraße 10
08309 Eibenstock, Germany
Phone: +49 (0) 3 77 52 - 50 30
Fax: +49 (0) 3 77 52 - 20 19
Internet: www.eibenstock.com
E-Mail: office@eibenstock.com

Certified according to DIN EN ISO 9001:2015
Technical changes excepted! Illustrations may vary!

Your dealer::