



**EIBENSTOCK**  
Elektrowerkzeuge



  
**Mixing  
professionals**

For every material and application  
the right machine



## FEATURES OF STIRRERS

Whether painter, plasterer, drywall builders or bricklayer - EIBENSTOCK has the right machine for everyone, from a handy small stirrer to a mobile mixing station. Convince yourself of the robust construction, the easy handling as well as the reliability and longevity of our mixing tools.

For all EIBENSTOCK stirrers we offer (as an accessory) our quick-change adapter for changing all stirring rods with M 14 external thread without any tools (not for contra twin stirrer).





Extensions and quick change adapters allow the user to easily change the stirring rod and adapt the stirrer to the users size, without the need of any tools.




**BACK  
PROTECTION  
SYSTEM**

Ergonomics in Construction



**Damping and protection elements made of polyurethane**  
– protection of the machine and the surface in case of unintentional fall

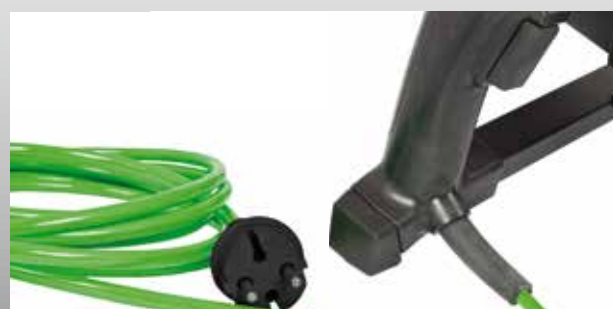

**Dust protected electronic switch, Pur-construction site cable and a protected cable outlet**



**Wide, trapezium design, ergonomic handles and balanced center of gravity** – easy, well balanced guiding of the machine for greater leverage

# Stirrers & stirring rods

Type		EHR 14.1 SK	EHR 15.2 SB	EHR 18.1 S	EHR 20.1 R
					
					
<b>AREAS OF APPLICATION</b>		<b>30 kg (max)</b>	<b>40 kg (max)</b>	<b>40 kg (max)</b>	<b>50 kg (max)</b>
<b>Paint / Varnish</b> Type of stirring rod		SG 120 RG 120	SG 120 RG 120	SG 120 RG 120	SG 120 RG 120
<b>Glue / Paste</b> Type of stirring rod		RG 120 LG 120	RG 120 LG 120	RG 120 LG 120	RG 120 LG 120
<b>Filling compound</b> Type of stirring rod		WG 120 MG 120	WG 120 MG 120	WG 120 MG 120	WG 135 MG 140
<b>Tile adhesive</b> Type of stirring rod		WG 120 M 120	WG 120 MG 120	WG 120 MG 120	WG 135 MG 140
<b>Mortar</b> Type of stirring rod		MG 120	WG 120 MG 120	WG 120 MG 120	WG 135 MG 140
<b>Plaster</b> Type of stirring rod			WG 120 MG 120	WG 120 MG 120	WG 135 MG 140
<b>Screed</b> Type of stirring rod				WG 120 MG 120	WG 135 MG 140
<b>Concrete</b> Type of stirring rod				MG 120	MG 140
<b>2C - materials</b> Type of stirring rod					WG 135 RPG 160
<b>Sealing compound</b> Type of stirring rod					RG 120
Type of stirring rod		S	R	W	M
					
		Disc stirring rod, galvanised	Round stirring rod, galvanised	Helicon ribbon stirring rod, galvanised	Mortar stirring rod, galvanised

EHR 20/2.6 S	EHR 23/2.5 S	EHM 162 S	EZR 24 R R/L	EHR 750 B
<b>2</b>	<b>2</b>	<b>1</b>	<b>1</b>	<b>1</b>
<b>50 kg (max)</b>	<b>80 kg (max)</b>	<b>80 kg (max)</b>	<b>80 kg (max)</b>	<b>80 kg (max)</b>
SG 120	SG 150	SG 150	Z 200	SG 120
RG 120	RG 120	RG 120		RG 120
RG 120	RG 120	RG 120	Z 200	RG 120
LG 120	LG 120	LG 120		LG 120
WG 135	WG 160	WG 160	Z 230	WG 135
MG 140	MG 140	MG 140		MG 140
WG 135	WG 160	WG 160	Z 230	WG 135
MG 140	MG 160	MG 160		MG 140
WG 135	WG 160	WG 160	Z 230	WG 135
MG 140	MG 160	MG 160		MG 140
WG 135	WG 160	WG 160	Z 230	WG 135
MG 140	MG 160	MG 160		MG 140
WG 135	WG 160	WG 160	Z 230	WG 135
MG 140	MG 160	MG 160		MG 140
MG 140	MG 160	MG 160	Z 230	MG 140
WG 135	WG 160	WG 160	Z 230	WG 135
RPG 160	RPG 160	RPG 160		RPG 160
RG 120	RG 120	RG 120		RG 120



LG	RP	Z200	Z 220	Z 230
Glue stirring rod, galvanised	Mixing paddle, galvanised	Special stirring rod, galvanised	Special stirring rod, galvanised	Special stirring rod, galvanised



# Stirrers sets

## EHR 14.1 SK Set

THE LIGHTWEIGHT



up to  
**30**  
kg

1

max.  
**120**

### FEATURES:

- electronic switch – stepless speed control for less splashing
- large handles – effortless working
- T-wise handling – comfortable mixing

### APPLICATION:

- Drywall construction, tiler, painter and plasterer

## EHR 15.2 SB Set

THE HANDY



up to  
**40**  
kg

1

max.  
**120**

- electronic switch – stepless speed control for less splashing
- space-saving metal bow with soft grip handle
- handy, vibration reducing, non-slip, easy to lay down, comfortable transport

- Drywall construction, tiler, painter and plasterer

Power input	960 W	1050 W
Rated voltage	230 V~	230 V~
Rated speed	0-390 rpm	0-450 rpm
No-load speed	0-590 rpm	0-800 rpm
Basket diameter	max. 120 mm	max. 120 mm
Spindle connection	M 14 female	M 14 female
Weight	2.9 kg	3.1 kg
<b>Order no.</b>	<b>07753000</b>	<b>077E5000</b>
Supplied	in a box incl. stirring rod WG 120	in a box incl. stirring rod WG 120



## EHR 18.1 S Set

THE ENTRY-LEVEL MODEL



up to  
**40 kg**

1

max.  
**120**

### FEATURES:

- dust protected electronic switch – stepless speed control for less splashing
- robust metal frame handle in ergonomic trapezium design with damping and protective elements for gentle storage
- robust Pur-construction site cable

### APPLICATION:

- Drywall construction, tiler, painter and plasterer, civil engineering

## EHR 20.1 R Set

THE ELECTRONIC ADJUSTABLE



up to  
**50 kg**

1

1

max.  
**140**

- stepless speed regulation and constant speed – optimum settings on the material to be mixed
- dust protected electronic switch
- stepless speed control for less splashing
- temperature control
- robust metal frame handle in ergonomic trapezium design with damping and protective elements for gentle storage
- robust Pur-construction site cable

- Drywall construction, plaster, civil engineering, landscaping

Power input	1100 W	1300 W
Rated voltage	230 V ~	230 V ~
Rated speed	0-450 rpm	250-580 rpm
No-load speed	0-800 rpm	
Basket diameter	max. 120 mm	max. 140 mm
Spindle connection	M 14 female	M 14 female
Weight	4,1 kg	4,9 kg
<b>Order no.</b>	<b>077E1000</b>	<b>07742000</b>
Supplied	in a box incl. stirring rod WG 120	in a box incl. stirring rod MG 140



# Stirrers sets

## EHR 20/2.6 S Set

THE VERSATILE



### FEATURES:

- dust protected electronic switch
- stepless speed control for less splashing
- 2-speed gearbox – the right speed for every application
- robust metal frame handle in ergonomic trapezium design with damping and protective elements for gentle storage
- robust Pur-construction site cable

### APPLICATION:

- Drywall construction, tiler, plasterer, civil engineering, landscaping

## EHR 23/2.5 S Set

THE POWERFUL



- strong motor for heavy mixing jobs
- dust protected electronic switch
- stepless speed control for less splashing
- 2-speed gearbox – the right speed for every application
- robust metal frame handle in ergonomic trapezium design with damping and protective elements for gentle storage
- robust Pur-construction site cable

- Drywall construction, tiler, plasterer, civil engineering, landscaping

## EHM 162 S Set

Back in our product range

THE STRONG



- extreme powerful 2000W motor for heavy mixing jobs
- long side handle (usable on both sides) – safe handling when mixing material of high viscosity)
- electronic switch – stepless speed regulation for less splashes
- space-saving metal bow with soft grip handle – handy, vibration reducing, non-slip, easy to lay down, comfortable transport
- robust Pur-construction site cable

- Drywall construction, tiler, plasterer, civil engineering, landscaping


Power input	1300 W	1800 W	2000 W
Rated voltage	230 V~	230 V~	230 V~
Rated speed	0-250/0-450 rpm	0-250/0-580 rpm	0-430 rpm
No-load speed	0-400/0-730 rpm	0-440/0-970 rpm	
Basket diameter	max. 140 mm	max. 180 mm	max. 180 mm
Spindle connection	M 14 female	M 14 female	M 14 female
Weight	5.1 kg	6.9 kg	6.0 kg
<b>Order no.</b>	<b>077E2000</b>	<b>077E3000</b>	<b>07779000</b>
Supplied	in a box incl. stirring rod MG 140	in a box incl. stirring rod MG160	in a box incl. stirring rod MG160





## EZR 24 R R/L Set

### THE ALL-ROUNDER



Stirring rods pull material from the bottom to the top, few air inclusions, easy guiding

up to  
**80 kg**



**1**

max.  
**230**

#### FEATURES:

- contra twin stirrer - two contra rotating stirring rods – no counter torque, easy handling, saves time and effort
- clockwise/anticlockwise: two mixing effects simply by switching – no need to change the stirring rods, best mixing results even with complicated materials (f.e. 2C)
- stepless speed regulation and constant speed – optimum settings for the material to be mixed
- robust metal frame handle in ergonomic trapezium design with damping and protective elements for gentle storage

#### APPLICATION:

- Drywall construction, tiler, painter and plasterer, civil engineering, gardening and landscaping, floor renovators

Power input	1800 W
Rated voltage	230 V ~
Rated speed	180-440 rpm
Basket diameter	230 mm
Spindle connection	Special
Weight	7.1 kg

<b>Order no.</b>	<b>0774W000</b>
Supplied	in a box incl. stirring rod Z 230

## EHR 750 B Set

### THE CORDLESS

Where the battery fails  
and power is needed



up to  
**80 kg**



**1**

max.  
**140**

- 4-stroke petrol-powered engine
- quick start, electronic ignition
- in comparison to 2-stroke engines smooth running, environmentally-friendly, lower emissions and lower fuel consumption

- Gardening and landscaping, road construction, railway, municipal enterprises, civil engineering

Engine/Capacity	4-stroke petrol engine/31 cc
Max. engine power	0.75 kW/1.0 hp
Rated speed	0-450 rpm
Max. basket-Ø	140 mm
Spindle connection	M 14 female
Weight	8.9 kg

<b>Order no.</b>	<b>0774W000</b>	<b>07B11000</b>
Supplied	in a box incl. stirring rod Z 230	in a box incl. stirring rod MG 140 and extension 150 mm



# Mixing stations & stirring rods

Type		Automix 1801	Automix 90	TwinMix 1800 T	FloorMix 2300		
							
AREAS OF APPLICATION		50 kg (max)	80 kg (max)	50 kg (max)	150 kg (max)		
Leveling fillers Type of stirring rod				1 / 2	6		
Floating screed Type of stirring rod				1 / 2	6		
Tile adhesive Type of stirring rod		3	5	1 / 2			
Thin-bed mortar Type of stirring rod		3	5	1 / 2			
Mortar Type of stirring rod		3	5	1 / 2			
Plaster Type of stirring rod		4	5	1 / 2			
Screed Type of stirring rod		4	5	1 / 2			
Concrete Type of stirring rod		4	5	1 / 2			
2C - materials Type of stirring rod			5	1 / 2			
Sealing compound Type of stirring rod			5	1 / 2			
Type of stirring rod		1	2	3	4	5	6
							
	Mixing paddle for TwinMix 1800 T	Universal rod for TwinMix 1800T	Mixing paddle for Automix 1801	Special stirring rod for Automix 1801	Special stirring rod for Automix 90	Special stirring rod for FloorMix 2300	

## Automix 1801

THE COMPACT ASSISTENT



### FEATURES:

- mobile mixing unit with transport cart
- robust universal motor – very high performance
- dust protected switch
- mechanical safety clutch
- low weight, compact design, separation of motor and base frame without any tools – easy to transport and space-saving storage
- protective grating – easy and safe pouring of bagged material
- hinged machine arm – easy bucket exchange

### APPLICATION:

- Civil engineering, floor renovators, landscaping

Power input	1500 W
Rated voltage	230 V~
Rated speed	50 rpm
No-load speed	115 rpm
Bucket size	65 l
Spindle connection	M 20 female
Weight	26.5 kg

**Order no.** 07614000

**Supplied** in a box incl. mixing paddle and bucket 65 l

## Automix 90

THE MOBILE SOLUTION



- mixing unit with separate trolley
- robust universal motor – very high performance
- dust protected switch
- mechanical safety clutch
- low weight, compact design, separation of motor and base frame without any tools – easy to transport and space-saving storage
- safety switch – cut-off in case of opening the protective grating
- hinged machine arm – easy bucket exchange

- Civil engineering, floor renovators, landscaping


Power input	1500 W
Rated voltage	230 V~
Rated speed	50 rpm
No-load speed	115 rpm
Bucket size	90 l
Spindle connection	M 20 female
Weight	35.0 kg

**Order no.** 07617000

**Supplied** in a box incl. special stirring rod and bucket 90 l



**Integrated transport cart**  
with draught-bar – for mobile use

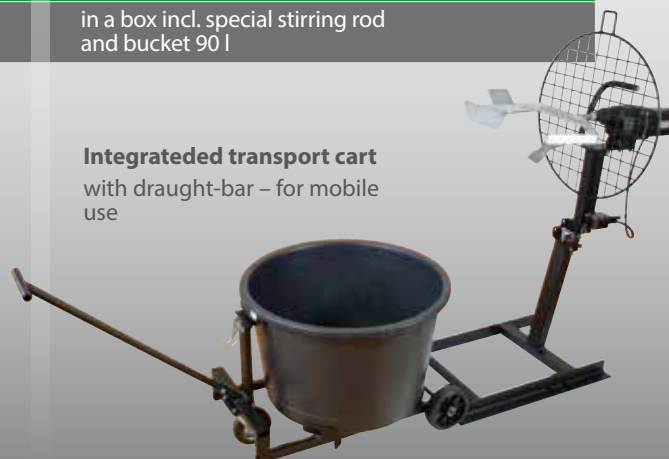



# TwinMix 1800 T

THE THOROUGHLY & UNIVERSAL

## Patented system

Innovative drive solution:  
one motor – two contra  
rotating mixing tools



## FEATURES:

- homogeneous and lump free mixing of numerous materials with different viscosity
- **especially convenient for the mixing of self-levelling floor levelling compounds, plaster, thin-bed mortar, fillers**
- with mixing carriage and tipper (accessory)
- mixing paddle with scraper – avoids material deposits on the bucket rim and ensures together with a fast running inner rod a better mixing
- start mixing function with reduced speed
- electronic – soft start, constant speed, temperature control and over current cut-off

## APPLICATION:

- Building construction and civil engineering, landscaping, floor renovators, tilers

Power input	1800 W
Rated voltage	230 V~
Rated speed stirring rod	250/450 rpm
Rated speed mixing paddle	20/36 rpm
Bucket size	65 l
Spindle connection	M 14 / Special
Weight	70.0 kg
<b>Order no.</b>	<b>07623000</b>
Supplied	on a pallet incl. mixing rod, mixing paddle, bucket 65 l and transport carriage

## Fast, uninterrupted work when using several mixing carriages, f. e. for levelling filler

- ☞ saves time and costs
- ☞ reduces the risk that the material is setting too fast in wet-on-wet cycle



## Timer for setting the requested mixing time (Accessory for TwinMix 1800 T)



10:15

Mixture 1




Mixture 2



10:20

Mixture 2



Mixture 3



## Health protected mixing (dust reduced construction site, especially in the interior)

Hazardous dust (e. g. silica dust) has to be suctioned by a Dust Class M Vacuum Cleaner!

For our electric power tools we are recommending to use a Vacuum Cleaner of our Eibenstock DSS range!



## FloorMix 2300

LARGE MIXING VOLUME

### Four speed settings

by 2-speed gearbox and two electronic speed levels – optimal mixing results



Robust, powerful 2300 W motor – very high performance



Optimal mixing results:



Effective working especially in wet-on-wet cycle:



### FEATURES:

- homogeneous and lump free mixing of floating screed, leveling fillers, fiber-reinforced fillers, colored coatings, liquid plastics
- **optimally suited for low-viscosity flooring compounds**
- electronic – soft start, constant speed, temperature control and over current cut-off
- special stirring rod avoids clumping and material deposits on the base and sides
- switch with dust protection and protection against re-start
- start mixing function with reduced speed and optimal adjustment of the speed to the mixing material
- drive unit with stirring rod can be separated from the carriage without any tools – easy to clean
- 4 castors – move into all directions, highest mobility, pouring and driving in one step

Easy to clean:



**Health protected mixing (dust reduced construction site, especially in the interior)**

Hazardous dust (e. g. silica dust) has to be suctioned by a Dust Class M Vacuum Cleaner! For our electric power tools we are recommending to use a Vacuum Cleaner of our Eibenstock DSS range!






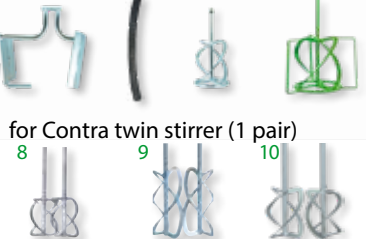


### APPLICATION:

- Floor renovators, tilers

Power input	2300 W
Rated voltage	230 V~
Rated speed	70/130/160/280 rpm
Bucket size	110 l
Spindle connection	M 16
Weight	48.0 kg
<b>Order no.</b>	<b>07625000</b>
Supplied	on a pallet incl. special stirring rod and bucket 110 l

# Stirring rods

Stirring rod	type	max. basket-Ø in mm	length in mm	batch in kg	shank connection	
<b>S</b> Disc stirring rod 	S 55	55	350	5	Ø 7	31501000
	S 80	80	350	15	Ø 7	31502000
	S 100	100	500	40	6- SW 10	31513000
	SG 120	120	590	50	M 14	31524000
	SG 150	150	500	150	M 14	31527000
	SGR 120* <sup>2</sup>	120	590	50	M 14	31525000
<b>R</b> Round stirring rod * <sup>2</sup> 	R 70	70	400	10	6- SW 8	31111000
	R 85	85	400	15	6- SW 8	31112000
	R 100	100	600	20	6- SW 10	31113000
	R 120	120	600	25	6- SW 10	31114000
	RG 100	100	600	20	M 14	31123000
	RG 120	120	600	25	M 14	31124000
<b>W</b> Helicon ribbon stirring rod 	W 70	70	400	5	6- SW 8	31211000
	W 85	85	400	8	6- SW 8	31212000
	W 95* <sup>2</sup>	95	500	10	6- SW 8	31218000
	W 100	100	600	15	6- SW 10	31213000
	W 120* <sup>2</sup>	120	600	20	6- SW 10	31214000
	WG 100* <sup>2</sup>	100	600	15	M 14	31223000
	WG 120* <sup>2</sup>	120	600	20	M 14	31224000
	WG 135* <sup>2</sup>	135	600	50	M 14	31225000
	WG 160* <sup>2</sup>	160	600	80	M 14	31227000
	WGV 120* <sup>1</sup> * <sup>2</sup>	120	600	25	M 14	31414000
	M 120	120	600	25	6- SW 12	31314000
	MG 120	120	600	25	M 14	31324000
<b>M</b> Mortar stirring rod * <sup>2</sup> 	MG 140	140	600	50	M 14	31326000
	MG 160	160	600	80	M 14	31327000
	MG 180	180	600	80	M 14	31328000
	MG 200	200	600	100	M 14	31329000
	MG 120 L*	120	600	25	M 14	31334000
	MG 140 L*	140	600	50	M 14	31336000
	MG 160 L*	160	600	80	M 14	31337000
	MGV 120	120	600	25	M 14	31424000
	MGV 140	140	600	50	M 14	31426000
	MGV 160	160	600	80	M 14	31427000
<b>LG</b> Glue stirring rod <b>RP</b> Mixing paddle 	LG 120	120	600	25	M 14	31024000
	RP 120* <sup>1</sup>	120	450	25	Ø 10	31434000
 for Contra twin stirrer (1 pair)	RPG 160	160	600	50	M 14	31437000
	1) Mixing paddle for Automix 1801				M 20	31440000
	2) Special stirring rod for Automix 1801				M 20	31442000
	3) Special stirring rod for Automix 90				M 20	31460000
	4) Mixing paddle for TwinMix 1800/TwinMix 1800 T				special	31451000
	5) Scraper for mixing paddle for TwinMix 1800/TwinMix 1800 T (3pcs.)					32351000
	6) Universal stirring rod for TwinMix 1800/TwinMix 1800 T				M 14	31452000
	7) Special stirring rod for FloorMix 2300				M 16	31640000
	8) Z 200	200	600	40	special	31620000
	9) Z 220	220	600	60	special	31610000
	10) Z 230	230	600	80	special	31630000

\* left hand spiral \*<sup>1</sup> stainless steel- V2A (1.4301; AISI 304) \*<sup>2</sup> protecture ring



## M 14 Quick change adapter

For all stirrers with M 14 female thread connection and all stirring rods with M 14 male thread connection



- |   |                                       |          |
|---|---------------------------------------|----------|
| 1 | Quick change adapter M 14 with insert | 32143000 |
|---|---------------------------------------|----------|

32143000



- |   |  |          |
|---|--|----------|
| 2 | Insert for quick change adapter M 14 (for stirring rods M 14 male) | 32144000 |
|---|--|----------|

32144000



- |   |  |          |
|---|--|----------|
| 3 | Quick change adapter set M 14 with two inserts | 32145000 |
|---|--|----------|

32145000

## Adapter/Extensions

We offer the following adapters for the use with stirrers of other brands:



1	5/8" female - M 14 female	e.g. BOSCH, Makita	32123000
2	1/2" female - M 14 female	e.g. Baier	32113000
3	M 14 male - 1/2" male	e.g. Hitachi	32147000
4	M 14 female - M 14 female	e.g. FESTOOL	32153000
5	M 18 female - M 14 female	e.g. FLEX, PFT	32173000
6	5/8" male - M 14 female		32133000
7	MT 2 - M 14 female	e.g. heavy duty drilling machines	33113000
8	MT 3 - M 14 female	e.g. heavy duty drilling machines	33123000
9	M 14 male - B 18	e.g. chuck	32142000
10	SDS-plus - M 14 female	e.g. hammer drill	32134000
11	Extensions	150 mm x M 14	32230000
		250 mm x M 14	32210000
		400 mm x M 14	32220000

### FEATURES QUICK CHANGE ADAPTER:

- stirring rods can be changed with the plug in quick change adapter, without the need of any tools
- quick change of the mixing tool for different materials
- space saving transport and easy cleaning of the stirring rods
- retrofit for all stirrers with M 14 (female) thread
- operation - screw the clutch of the quick change adapter in the stirrer and plug in the stirring rod, to remove, simply pull back the capsule on the clutch











## BUCKET CLAW - THE PRACTICAL HOLDER FOR STIRRING RODS, PAINT BRUSHES, TROWELS AND SCRAPERS

When working with paint, mortar and adhesive there always exists the risk of resulting stains around the workplace. For avoiding this, the special Bucket Claw is offering a clever solution. It is mounted by easy clipping on the bucket rim. Because of its special shape it fits on almost every bucket. From now on coated stirring rods, paint brushes, trowels and scrapers can be fixed on the bucket rim and can drip off easily. In addition the bucket claw can be used as wall holder for your tools.



32350000

TwinMix 1800 T			Bestellnummer
	1	<b>Transport carriage with 2 big wheels</b> (incl. Bucket 65 l)	09Z11000
	2	<b>Tipper with 4 wheels (2 steerable)</b> (incl. Bucket 65 l)	09Z12000
	3	<b>Timer for TwinMix 1800 T</b>	32352000
	4	<b>Bucket 65 l</b>	32341000
FloorMix 2300			
	5	<b>Bucket 110 l</b>	32343000
Automix 1801			
	6	<b>Bucket 65 l</b>	32341000
Automix 90			
	7	<b>Bucket 90 l</b>	32342000
	8	<b>Transport carriage</b>	32331000

Elektrowerkzeuge GmbH Eibenstock  
Auersbergstraße 10  
08309 Eibenstock, Germany

Phone: +49 37752 503-0  
Fax: +49 37752 2019  
Internet: [www.eibenstock.com](http://www.eibenstock.com)  
E-Mail: [office@eibenstock.com](mailto:office@eibenstock.com)

Certified according to DIN EN ISO 9001:2015  
Technical changes excepted! Illustrations may vary!

Your distributor: