



EIBENSTOCK

Elektrowerkzeuge

100 JAHRE 1919 2019



Mineral dust may cause cancer!



Hazardous dust (e. g. silica dust) has to be suctioned by a Dust Class M Vacuum Cleaner!
For our electric power tools we are recommending to use a Vacuum Cleaner of our Eibenstock DSS range!



PROFESSIONAL
GERMAN SINCE 1919
POWER TOOLS

CONCRETE GRINDER

EBS 180 F

With floor guiding device for relaxed working in upright posture



The concrete grinder with height-adjustable carriage for better grinding result



Ø 180

| Specifications | EBS 180 F |
|--------------------|---------------------------------------------------------------------|
| Power input | 2500 W |
| Rated voltage | 230 V ~ |
| No-load speed | 8500 rpm |
| Disc diameter | 180 mm |
| Spindle connection | Ø 22.2 mm |
| Weight | 10.5 kg |
| Order no. | 0634H000 |
| Supplied | in a box incl. diamond-grinding wheel (concrete) and assembly tools |


USE:

- Grinding and smoothing of surfaces
- Removing of residual mud, plaster and coatings
- Preparing of surfaces, e.g. for tile renovation
- For every surface: PCD-grinding wheel with monobloc diamonds – high removal rate and long lasting (accessory)

FEATURES:

- Powerful 2500 W motor
- Motor arrangement vertical in a low dust zone – durable
- Electronic – soft start, temperature control and over current cut-off
- Segment on the dust guard detachable – for grinding directly to the edge of the work area
- Brush rim – high suction power for dust-free working by connecting an industrial vacuum cleaner (accessory) to the 35 mm nozzle
- Tilt-adjustable floor guiding device and additional handle adjustable in height – optimal adjustment to the body height of the operator for a comfortable guiding

| Accessories | Order no. |
|---------------------------------------------|-----------|
| Diamond-grinding wheel concrete Ø 180 mm | 37112000 |
| Diamond-grinding wheel screed Ø 180 mm | 37111000 |
| PCD-grinding wheel Ø 175 mm, round segments | 37119000 |
| Brush rim, 2 parts | 37227000 |

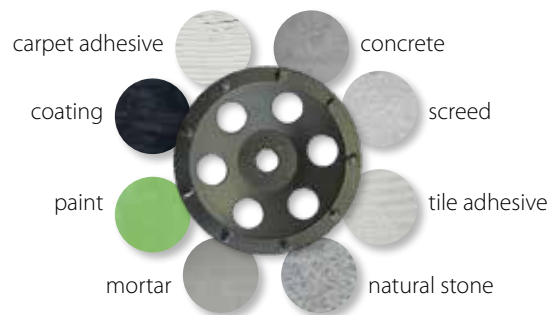

Elektrowerkzeuge GmbH Eibenstock
Auersbergstraße 10
08309 Eibenstock, Germany

Phone: +49 (0) 3 77 52 - 50 30
Fax: +49 (0) 3 77 52 - 20 19
Internet: www.eibenstock.com
E-Mail: office@eibenstock.com

Certified according to DIN EN ISO 9001:2015
Technical changes excepted! Illustrations may vary!

Your distributor: